

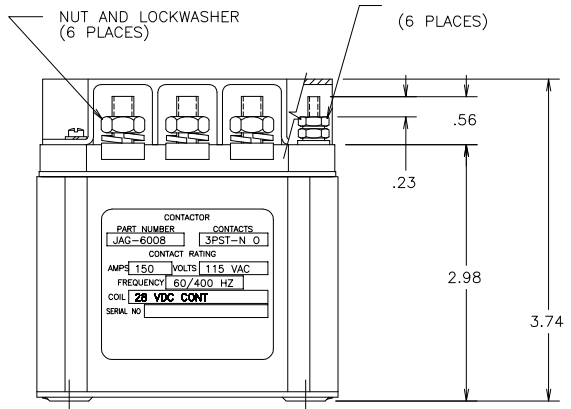


JAG-6 SERIES.
OTHER ELECTRICAL CONTACT & TERMINAL CONFIGURATIONS AVAILABLE.

CONSTRUCTION:	GASKET SEALED (VENTED)
MAIN CONTACTS CONFIGURATION	3PST-N.O.
VOLTAGE NOMINAL	115/200 V.A.C. 60 OR 400 HZ.
CURRENT RES.	150 AMP.
RUPTURE	1500 AMP.
AUXILIARY CONTACTS CONFIGURATION	2 SPST-N.O.
VOLTAGE	28 V.D.C. OR 115 V.A.C.
CURRENT RES.	5 AMP.
COIL DATA	CONTINUOUS
DUTY CYCLE	28 V.D.C.
NOMINAL COIL VOLTAGE	18 V.D.C.
PICKUP MAX.	1.5 V. TO 7.0 V.
DROPOUT VOLTAGE	
ENVIRONMENTAL DATA	
AMBIENT TEMP.	-55°C. TO +71°C.
VIBRATION SINE	.036 D.A. FROM 10 TO 52 HZ. 5 G. FROM 52 TO 500 HZ.
ACCELERATION	10 G.
SHOCK	25 G. MAX. FOR 6 TO 9 MILLISECONDS
LIFE ELECTRICAL	50,000 CYCLES MIN.
LIFE MECHANICAL	100,000 CYCLES MIN.
WEIGHT	2.8 LBS.MAX.

- NOTES:
1. TOLERANCE ON INCHES IS .00 ± .060 & .000 ± .030
 2. DESIGNED TO THE BASIC REQUIREMENTS OF MIL-R-6106 TYPE II
 3. TERMINAL SHIELD NOT SHOWN IN TOP VIEW FOR CLARITY.
 4. FINISH HARDWARE SUPPLIED AS SHOWN.

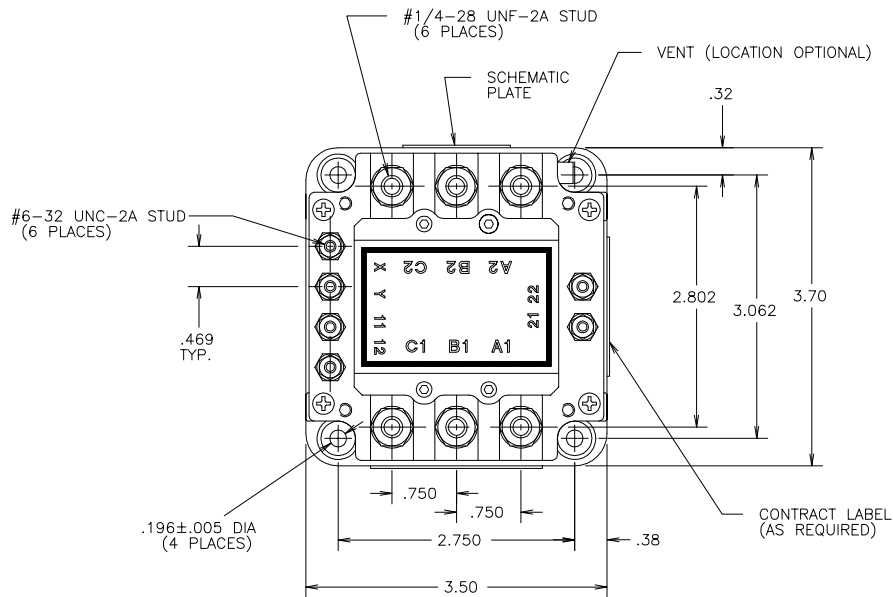

SCHEMATIC PLATE

CONTACTOR	
PART NUMBER	CONTACTS
JAG-600B	3PST-N O
CONTACT RATING	
AMP 150	VOLTS 115 VAC
FREQUENCY 60/400 HZ	
COIL 28 VDC CONT	
SERIAL NO	

CHANGE RECORD		UNLESS OTHERWISE SPECIFIED:		Unless this drawing is being viewed from the file server of Ametek/Prestolite Power and Switch, it is an UNCONTROLLED DOCUMENT. DESTROY ALL COPIES AFTER INITIAL USE!	
E.C. No.	DATE	DIMENSIONS ARE IN INCHES [MILLIMETERS]. TOLERANCES BELOW APPLY EXCEPT FOR VENDOR DESIGNED PARTS AND ITEMS PRODUCED TO RECOGNIZED STANDARDS.		FINISH CODE PER NONE	
		PLOT DATE		ACTIVITY	REPLACES
		FILE NAME			
		8-6-10 JAG-6 SERIES			
FRACT. INCH ± ---		ANGLES ± 3'		TITLE	
				CONTACTOR ASSEMBLY	
DECIMAL-INCH		METRIC		DESIGNATED DATA	
.00 ± .06		0.0 ± 1.5mm		DESIGNED	DRAWN
.000 ± .030		0.00 ± 0.75mm		DATE	SCALE
				08-03-2010	FULL
				CHECKED	APPROVED
				RECORDS	SHEET
					2 OF 2

CONFIDENTIAL: This drawing, including all information contained therein, is the exclusive and confidential property of Ametek/Prestolite Power and Switch, of Troy, Ohio 45373. This drawing is not to be copied, reproduced, delivered or disclosed to others, in whole or in part, except with express written permission.

AMETEK
PRESTOLITE POWER AND SWITCH
TROY, OHIO 45373, U.S.A.

SIZE: C JAG-6 SERIES

DWG. NO.