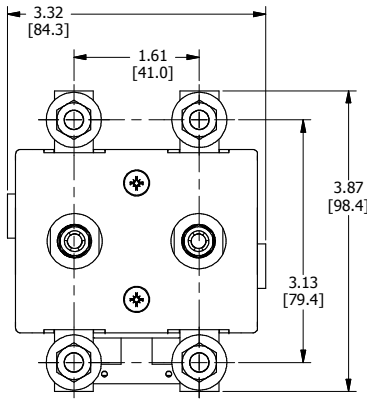

DOUBLE POLE
SINGLE THROW, N.O.



DOUBLE POLE
SINGLE THROW, N.O.





HB7 SERIES

CONTACT CONFIGURATION: DPST, N.O.

MAIN CONTACT DATA
- I THERMAL, Ith: 200 AMPS
- INDUCTIVE LOAD: 200 AMPS @ 0 - 48 VDC
- ARC RUPTURE: 1675 AMPS
- CONTACT VOLTAGE DROP: <40 mV TYPICAL
- MATERIAL: AgSnO2

COIL DATA
- COIL VOLTAGES: 12 - 340 VDC
- COIL TYPES:
  - CONTINUOUS DUTY
  - INTERMITTENT DUTY

OPTIONS
- AUXILIARY CONTACTS
  - 10 AMPS, 250VAC
  - FORM C SPDT
- COIL SUPPRESSION
- T - COIL TERMINALS
- FLYING LEADS
- ACV COIL W/ RECTIFIER
- CUSTOMER SPECIFIC BUS BAR DESIGNS
- PLATED BUSBARS

TEMPERATURE: -20°C TO +50°C
MECHANICAL LIFE: >3 X 10^6
IP CODE: IP31 PER IEC 60529
APPROXIMATE WEIGHT: 0.75 kg [1.65 lbs]
RoHS COMPLIANT
MATERIAL HANDLING UL FILE: Au2277

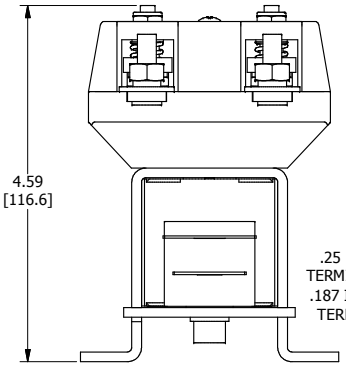

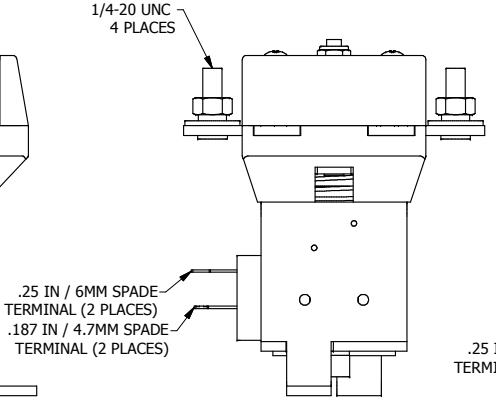

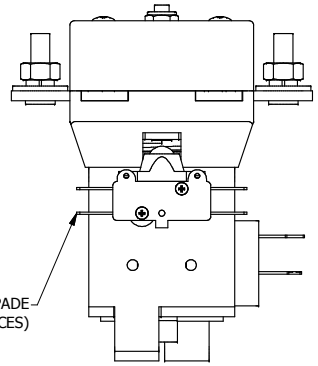

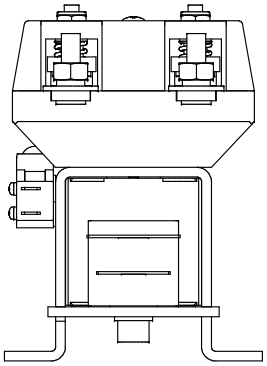

COIL TERMINAL OPTIONS:
1. TWO .25 IN / 6MM TERMINALS.
2. T TERMINAL WHICH HAS .25 IN / 6MM ON TOP AND .187 IN / 4.7 MM BOTTOM TERMINALS.
3. FLYING LEADS.

CHANGE RECORD		UNLESS OTHERWISE SPECIFIED:	Unless this drawing is being viewed from the file server of Ametek/Prestolite Power and Switch, it is an UNCONTROLLED DOCUMENT. DESTROY ALL COPIES AFTER INITIAL USE!
E.C. No.	DATE	DIMENSIONS ARE IN INCHES [MILLIMETERS]. TOLERANCES BELOW APPLY EXCEPT FOR VENDOR DESIGNED PARTS AND ITEMS PRODUCED TO RECOGNIZED STANDARDS.	FINISH CODE PER
		PLOT DATE: 08-03-2010	FILE NAME: HB7 SERIES
		FRACT. INCH ±	ANGLES ± 0.5°
		DECIMAL-INCH: .0 ± .06; .00 ± .01; .000 ± .005	METRIC: 0. ± 1.5; 0.0 ± 0.3; 0.00 ± 0.13
		DO NOT SCALE DRAWING	

ACTIVITY | REPLACED BY | REPLACES

TITLE: CONTACTOR, DPST, N.O.

DESCRIPTIVE DATA

DESIGNED	DRAWN	DATE	SCALE
		08-03-2010	
CHECKED	APPROVED	RECORDS	SHEET
			3 of 4

CONFIDENTIAL: This drawing, including all information contained thereon, is the exclusive and confidential property of Ametek/ Prestolite Power and Switch, of Troy, Ohio 45373. This drawing is not to be copied, reproduced, delivered or disclosed to others, in whole or in part, except with express written permission.

AMETEK PRESTOLITE SWITCH
TROY, OHIO 45373, U.S.A.

SIZE | DWG. NO. HB7 SERIES